



Mobile Ceiling Hangers Assembly Instructions

MTWS-160 & MTWS-265 Three Panel Displays

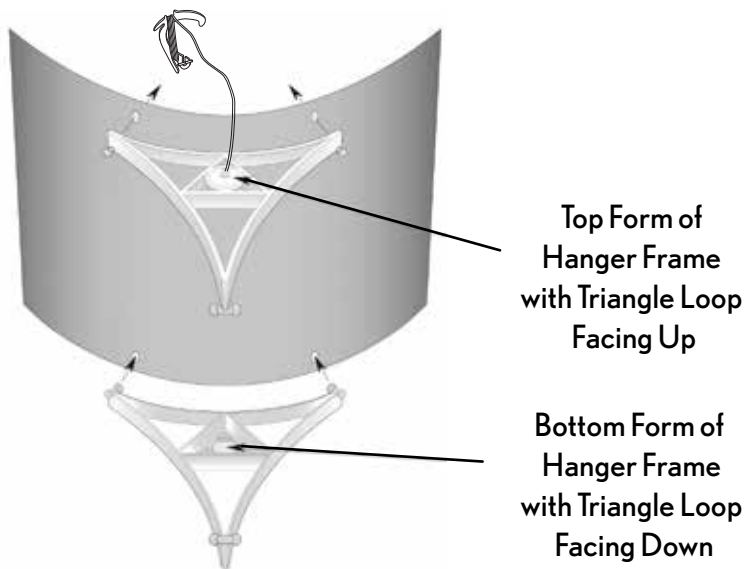

MQ-360 Four Panel Display

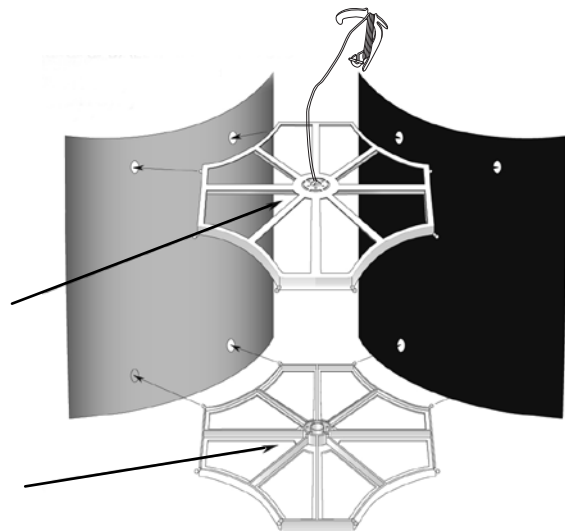


Start by attaching panels to the top of the plastic frames. Assemble the panels to the plastic frames by inserting the ball shaped posts into the holes of the panels; first at the top. Then insert the ball shaped posts into the holes at the bottom of the panels. When panels are in place, then insert the metal barbed end of the cord through the triangle loop on top of the hanger frame.

For Pole Display

Carefully remove center disc in bottom frame to accommodate pole.

Fit assembled display down onto pole and put pole top into rimmed area inside top former.


Bottom Frame

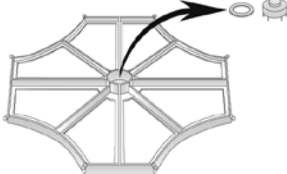

Bottom Frame



Top Frame

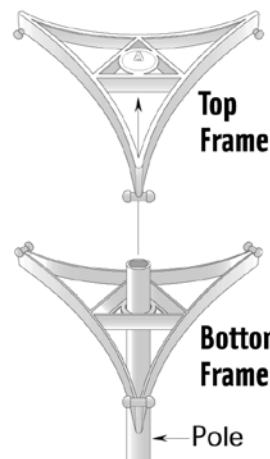

Bottom Frame

Pole

WARNING FOR HANGING INSTRUCTIONS

Mobile ceiling mountings are designed to support lightweight signs only and intended for indoor use. Certain displays may result in unsafe condition. Instructions must be carefully followed to avoid such conditions.

- 1.) **MOBILE CEILING MOUNTINGS SHOULD NOT BE USED IN CERTAIN ENVIRONMENTS AS INJURY OR DAMAGES MAY OCCUR.** Mobile ceiling mountings are designed for indoor use in which room temperature is between 50° - 80° F. Colder or warmer environments may reduce the strength of the mounting. Weight limits listed apply to indoor use.
- 2.) **DISPLAY WEIGHT SHOULD NOT EXCEED 6 LBS., AS INJURY OR DAMAGE MAY OCCUR.** User should weigh display to assure mounting will provide adequate support.
- 3.) **STRUCTURES TO WHICH MOUNTINGS ATTACHED MUST BE EVALUATED SEPARATELY.** Ceiling structures vary; thus the manufacturer should be consulted concerning strength of ceiling support.
- 4.) **DISPLAY SHOULD NOT BE MOUNTED IN THE DIRECT PATH OF HEATING OR AIR CONDITIONING DUCTS, AS INJURY OR DAMAGE MAY OCCUR.** Possible excessive motion of the mobile may weaken the supporting system i.e. string and / mounting.

